

ENGEL

portable fridge-freezers

A LEGEND IN RELIABILITY

MR40F
ECLIPSE



TECHNICAL SPECIFICATION SHEET

FEATURES:


100% CFC Free
Thermostat Controlled
Energy Efficient Sawafuji Swing Motor
Low DC Current Draw: 12V 2.75 Amps
Automatic Voltage Selection AC/DC
Polypropylene Cabinet

Generator & Solar Panel Compatible
Strong Construction
Compact & Lightweight
Noise Level: 32dB
Polyurethane Insulation
Turbo Fan

Carry Handles
Reversible Door Assembly
Stainless Steel Hinges
3 Year Manufacturers Warranty

SPECIFICATIONS:

Storage Volume:	Litres	38 Litres
Exterior Dimensions:	H x W x D	483mm x 636mm x 366mm
Interior Dimensions:	H x W x D	360mm x 386mm x 266mm
Exterior Finish:	Door	Polypropylene
	Cabinet	
Interior Finish:	Door	Polypropylene
	Cabinet	
Insulation:		Polyurethane (C.F.C. Free)
Input Voltage:	AC	AC 185 ~ 264V, 50/60Hz
	DC	DC 10.5 ~ 31V
Rated Amperage:	AC	AC 0.35A
	DC	DC 12V 2.75A, 24V 1.4A
Compressor Rating:		AC 13 ~ 16V, 50Hz, 33W
Refrigerant:		Tetrafluoroethane (R-134a)
Weight:		22kg

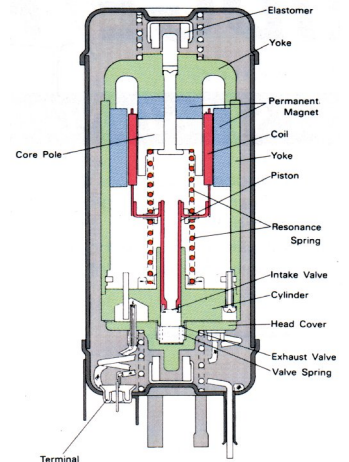


Sawafuji Swing Motor

ACCESSORIES:



Transit Bag - TBAGECL40

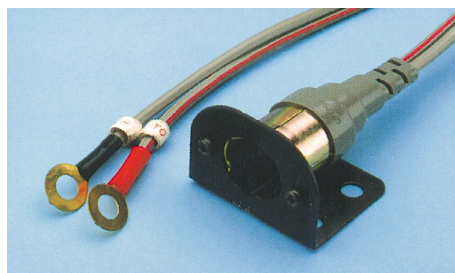

12 Volt Panel - APAN / ASPAN / BPAN

Slide-lok - TSL530/540

